



Centro Business 3.0 (G.Fast)

How to set up your router


➔ The package includes:



1 Remove your old Internet / telephony installations (if any).



2 Connect the DSL cable.

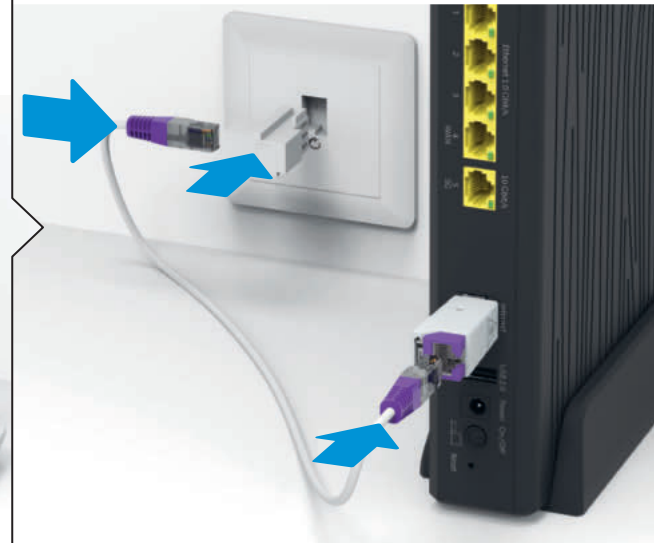

Installation overview



3 Connect the power adapter and switch on the router.



4 Wait for the and LEDs to light up white permanently.




The router can restart multiple times during the installation.

6 Please refer to the relevant instructions for setting up other services and products.



Send your old device back to Swisscom free of charge for recycling. Reset the router to factory settings beforehand.

5 Connect your phones directly to the router.

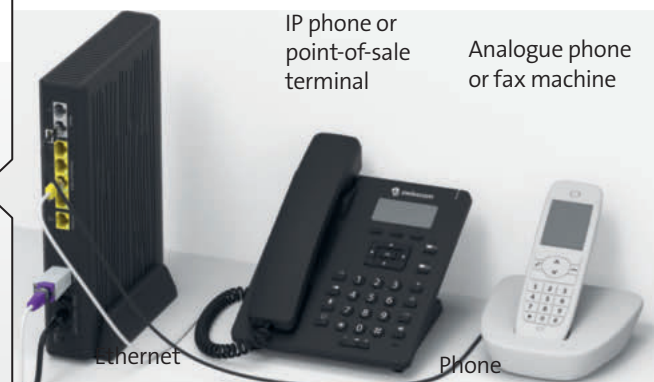

If you have subscribed to fixed network telephony, the service will be activated within 15 minutes and the LED lights up white.



Your internet is now ready.

Swisscom (Switzerland) Ltd.
Postfach
3050 Bern
www.swisscom.ch/kmu
0800 800 800

Swisscom (Switzerland) Ltd.
Enterprise Customers
3050 Bern
www.swisscom.ch/enterprise
0800 800 900

B2C-TSP-UID G.Fast 09/21 EN

LED behaviour

Ports, LEDs and buttons

WLAN LED

- LED is not on – WLAN is switched off.
- LED lights up blue – WLAN is switched on.
- LED flashes white – WPS mode is active.

Service LED

- LED lights up white – Business Network Solutions (BNS) is activated.

Telephony LED

- LED is not on – you are not subscribed to telephone services or there is a fault.
- LED lights up green – telephony is activated.
- LED lights up red – not all numbers are registered or registration is in progress.

Internet backup LED

(customers with «Failsafe Internet Backup service»)

- LED is not on – no backup dongle connected.
- LED flashes white (1–2 times per sec.) – backup dongle installation in progress.
- LED lights up white – backup service is ready.
- LED flashes white/red – Internet backup in operation.
- LED lights up red – there is a fault.
- LED flashes red fast (3–4 times per sec.) – activation fault has occurred. Please wait.

Mobile Internet LED

- LED is not on – no connection to a mobile Internet device.
- LED flashes green – connection to mobile Internet in progress.
- LED is green – mobile Internet is active.
- LED is red – there is a fault.

Internet LED

- LED is not on – no connection to the Internet.
- LED flashes white – connection to the Internet in progress.
- LED lights up white – Internet connection active and IP address assigned.
- LED lights up red – there is a fault.

Connect your router to a computer with the new Ethernet cable. For this, you will need a computer with an Ethernet port. Set up via WLAN is not possible.

Open the www.swisscom.ch website in your browser. If the registration page appears, please complete all mandatory fields.

Power LED

- LED is not on – router is switched off. If you are unable to switch it on, check the power supply.
- LED flashes white – router launch, configuration or update in progress. Please do not switch off.
- LED lights up white – router is ready.
- LED lights up red – there is a fault.

